



Palmetto Plastics INNOVATIONS

FILL AND DRIFT ELIMINATOR PRODUCTS

High-performance solutions engineered for cooling tower applications.

FILL PRODUCT		DESCRIPTION	TYPE	APPLICATION	SPECIFICATIONS
	**PCF1200**	**Palmetto CF1200** is a high-performance fill media designed for factory assembled towers in HVAC and Light Industrial applications.	Counterflow Cross-Flute	<25ppm TSS	**Depth (in.)** 12, 24 **Width (in.)** 6 to 12 **Length (in.)** Up to 120 **Thk (mil)*** 10, 15
	**PCF1900**	**Palmetto CF1900** is a high-performance fill media designed for HVAC, Industrial and Power applications.	Counterflow Cross-Flute	<25ppm TSS	**Depth (in.)** 6, 12, 24 **Width (in.)** 6 to 24 **Length (in.)** Up to 120 **Thk (mil)*** 10, 15, 20
	**POF**	**Palmetto OF** provides a superior combination of performance and fouling resistance in Industrial and Power applications.	Counterflow Vertical Offset-Flute	<200ppm TSS	**Depth (in.)** 12, 24 **Width (in.)** Up to 18 **Length (in.)** Up to 120 **Thk (mil)*** 10, 15, 20
	**PVC20**	**Palmetto VC20** Anti-Fouling fill is a high-performing, low fouling fill media designed for Industrial and Power applications.	Counterflow Vertical Flute	<500ppm TSS	**Depth (in.)** 16, 24, 48 **Width (in.)** Up to 24 **Length (in.)** Up to 120 **Thk (mil)*** 10, 15, 20
	**PXF75 IL/ID/STD**	**Palmetto XF IL/ID** is a high-performance fill media designed for HVAC and Light Industrial applications and the perfect solution for your factory assembled package crossflow cooling tower.	Crossflow High Eff Pack Fill	<25ppm TSS	**Depth (in.)** 12, 24 **Width (in.)** 6, 12, 24 **Length (in.)** Up to 120 **Thk (mil)*** 10, 15, 20

1000 William Hilton Parkway, J15 | Hilton Head Island, SC 29928 | 843-949-2977 | palmettoplastics.com

DRIFT ELIMINATOR PRODUCT	DESCRIPTION	TYPE	APPLICATION	SPECIFICATIONS
 **PCF150 & PXF150**	**Palmetto CF150 & XF150** are high-performance counterflow Drift Eliminators designed for heavy Industrial and Power applications where drift levels of 0.001% of the circulating water flow is required.	Counterflow Drift (PCF150) Crossflow Drift (PXF150)	<0.001%	**Depth (in.)** 5.25 **Width (in.)** 12, 24 **Length (in.)** 72 to 120 **Thk (mil)*** 15, 20
 **PTU12C**	**Palmetto Tripass Ultra-Low Drift Eliminator** is a high-performance counterflow product designed for heavy Industrial and Power applications where drift levels of 0.0005% of the circulating water flow is required.	Counterflow Drift	<0.0005%	**Depth (in.)** 5.75 **Width (in.)** Up to 24 **Length (in.)** 72 to 120 **Thk (mil)*** 15, 20

**After-Forming Thickness*
Custom thicknesses available.


Palmetto Plastics INNOVATIONS

Palmetto Plastics Innovations was founded to provide high quality cooling tower fill, drift eliminators and other plastic components to the cooling tower industry.

Our team is dedicated to combining extraordinary customer service and timely delivery to an industry that demands both.

MADE IN USA

certified WBENC WOMEN'S BUSINESS ENTERPRISE

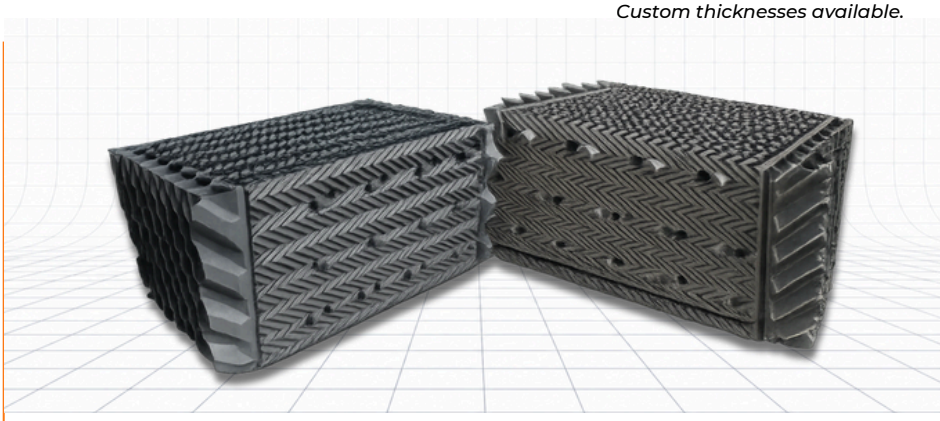

MISSION

Palmetto Plastics Innovations delivers innovative cooling tower fills and plastic components to customers across the United States. Our products are engineered to meet or exceed customer requirements, offering exceptional quality and timely delivery. PPI is committed to challenging the cooling tower industry through advanced design and strong market competitiveness.

VISION

Palmetto Plastics Innovations strives to be universally recognized as the premier supplier of cooling tower components and the trusted partner our customers eagerly return to. For us, innovation isn't a moment in time—it's a mindset that drives everything we do.

OUR VALUES

INNOVATION
Consistently ask if there is a better way to do things.

HONESTY
Tell the truth.

INTEGRITY
Do what we say we will do.

PROFESSIONALISM
Treat our customers with respect and courtesy.

1000 William Hilton Parkway, J15 | Hilton Head Island, SC 29928 | 843-949-2977 | palmettoplastics.com